


DENALI LARGE CURVE



150w Halogen lights
UL Listed
(Optional)

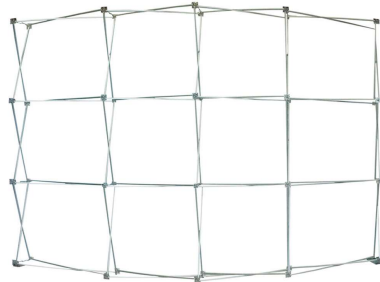

Half Hard Case is optional.



*Package includes padded nylon travel bag

PRODUCT DESCRIPTION

Our ultra lightweight aluminum alloy fabric pop-up display in a matte satin anodized finish is an ideal eye-catcher for your trade show, exhibition, or conference. It's versatility and simple 2-minute setup, as well as it's Velcro attachment, makes it functional for special events as well as an in-office promotional tool for walk-in customers. Another convenient feature is that your graphic stays attached in your free travel/carry bag that comes with each frame you purchase.

DISPLAY DIMENSIONS	112"W x 89"H x 35"D
GRAPHIC SIZE	132.5"W x 89.5"H

GRAPHIC MATERIAL

Stretch Fabric

GRAPHIC FINISHING

2" Loop Velcro on back perimeter

DISPLAY CONSTRUCTION

Aluminum frame, 2" Velcro (hook) strips, and plastic hooks.

SHIPPING WEIGHTS & DIMENSIONS

Shipping Weight	39 lbs (stand only) 43 lbs (frame and graphic)
Shipping Dimensions	37"L x 20"W x 17"H

LARGE QUANTITY FREIGHT

Freight Shipping	8 boxes per 48"L x 40"W x 76"H skid
Freight Weight	357 lbs (frame only) 389 lbs (frame & graphic)

AVAILABLE ACCESSORIES

- 150w Halogen lights - UL Listed
- Half Hard Case

DENALI LARGE CURVE

PARTS LIST




(Qty 1) Frame
(with pre-installed graphic)



(Qty 1) Padded nylon travel bag

DENALI LARGE CURVE

SET UP INSTRUCTIONS



1 Remove frame and graphic from nylon bag.




2 Ensure "adjustable feet" of frame are on the floor. Pull up display into upright position.



3 Lock all hooks between front and back hubs.




4 Adjust leveling feet for desired angle. Ready pop display can now easily be moved into position.

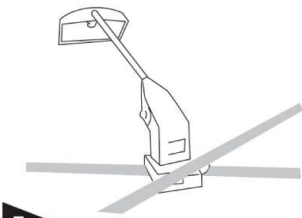


5 **OPTIONAL**
Attach lights to top of frame by sliding the plastic "x blocks" under the frames cross sections.

Warning: To avoid damage, separate end caps & disconnect ALL hooks before collapsing the frame.


How to install or replace graphics on your OneFabric:

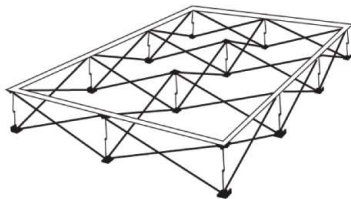

1 Assemble frame and lay flat on its back. Remove existing graphic.

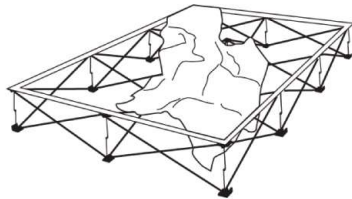

2 Starting at one corner, attach velcro on the graphic to velcro on the frame. **NOTE:** Velcro on the graphic should extend approx. 1/4" - 1/2" beyond velcro on the frame (it should not be flush).

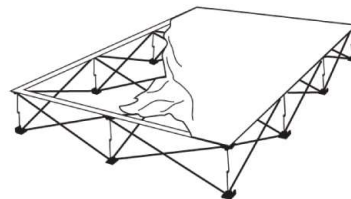

3 Working in a continuous direction around the frame, attach the rest of the graphic. Make sure the graphic is pulled taut while attaching the velcro.



4 If needed, adjust velcro for taut fit.