



# DENALI MEDIUM CURVE

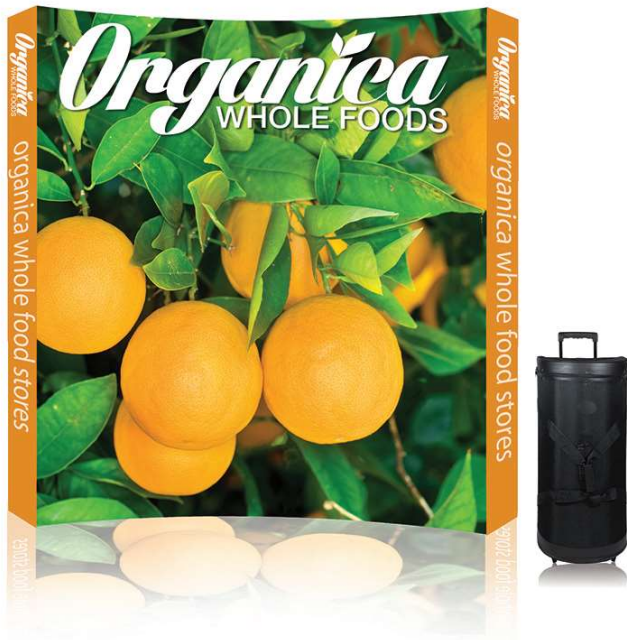

150w Halogen lights  
UL Listed  
(Optional)

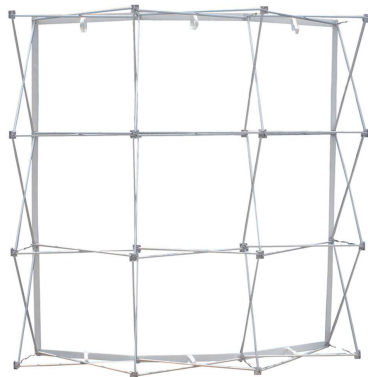

Half Hard Case is optional.



\*Package includes padded nylon travel bag

## PRODUCT DESCRIPTION

Our ultra lightweight aluminum alloy fabric pop-up display in a matte satin anodized finish is an ideal eye-catcher for your trade show, exhibition, or conference. It's versatility and simple 2-minute setup, as well as it's Velcro attachment, makes it functional for special events as well as an in-office promotional tool for walk-in customers. Another convenient feature is that your graphic stays attached in your free travel/carry bag that comes with each frame you purchase.

DISPLAY DIMENSIONS	90"W x 89"H x 24"D
GRAPHIC SIZE	106.25"W x 89"H

## GRAPHIC MATERIAL

Stretch Fabric

## GRAPHIC FINISHING

2" Loop Velcro on back perimeter

## DISPLAY CONSTRUCTION

Aluminum frame, 2" Velcro (hook) strips, and plastic hooks.

## SHIPPING WEIGHTS & DIMENSIONS

Shipping Weight	28 lbs (stand only) 30 lbs (frame and graphic)
Shipping Dimensions	41"L x 18"W x 17"H

## LARGE QUANTITY FREIGHT

Freight Shipping	12 boxes per 48"L x 40"W x 73"H skid
Freight Weight	381 lbs (frame only) 405 lbs (frame & graphic)

## AVAILABLE ACCESSORIES

150w Halogen lights - UL Listed

Half Hard Case

# DENALI MEDIUM CURVE

## PARTS LIST




(Qty 1) Frame  
(with pre-installed graphic)



(Qty 1) Padded nylon travel bag

# DENALI MEDIUM CURVE


## SET UP INSTRUCTIONS




**1** Remove frame and graphic from nylon bag.




**2** Ensure "adjustable feet" of frame are on the floor. Pull up display into upright position.

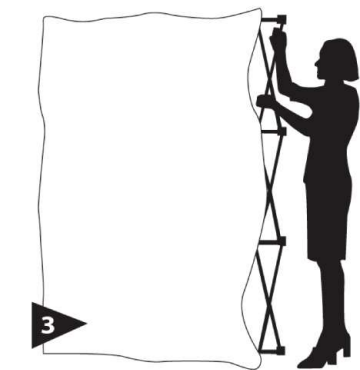

**3** Lock all hooks between front and back hubs.

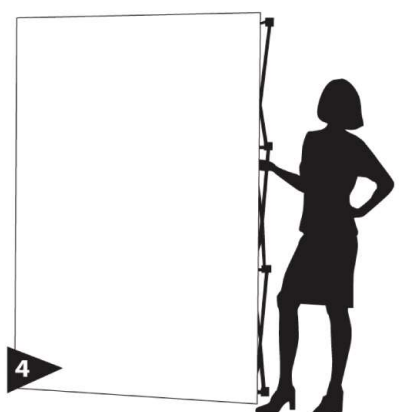


**4** Adjust leveling feet for desired angle. Ready pop display can now easily be moved into position.




**5** **OPTIONAL**  
Attach lights to top of frame by sliding the plastic "x blocks" under the frames cross sections.

**Warning:** To avoid damage, separate end caps & disconnect ALL hooks before collapsing the frame.


### How to install or replace graphics on your OneFabric:

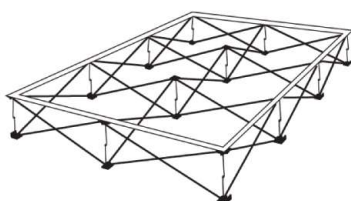

**1** Assemble frame and lay flat on its back. Remove existing graphic.

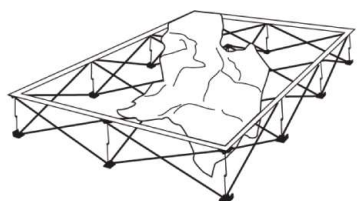

**2** Starting at one corner, attach velcro on the graphic to velcro on the frame. **NOTE:** Velcro on the graphic should extend approx. 1/4" - 1/2" beyond velcro on the frame (it should not be flush).

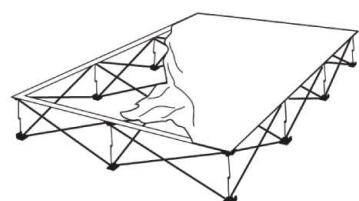

**3** Working in a continuous direction around the frame, attach the rest of the graphic. Make sure the graphic is pulled taut while attaching the velcro.



**4** If needed, adjust velcro for taut fit.